


# Legs for Freestanding Monitor Stand

## Assembly Guide

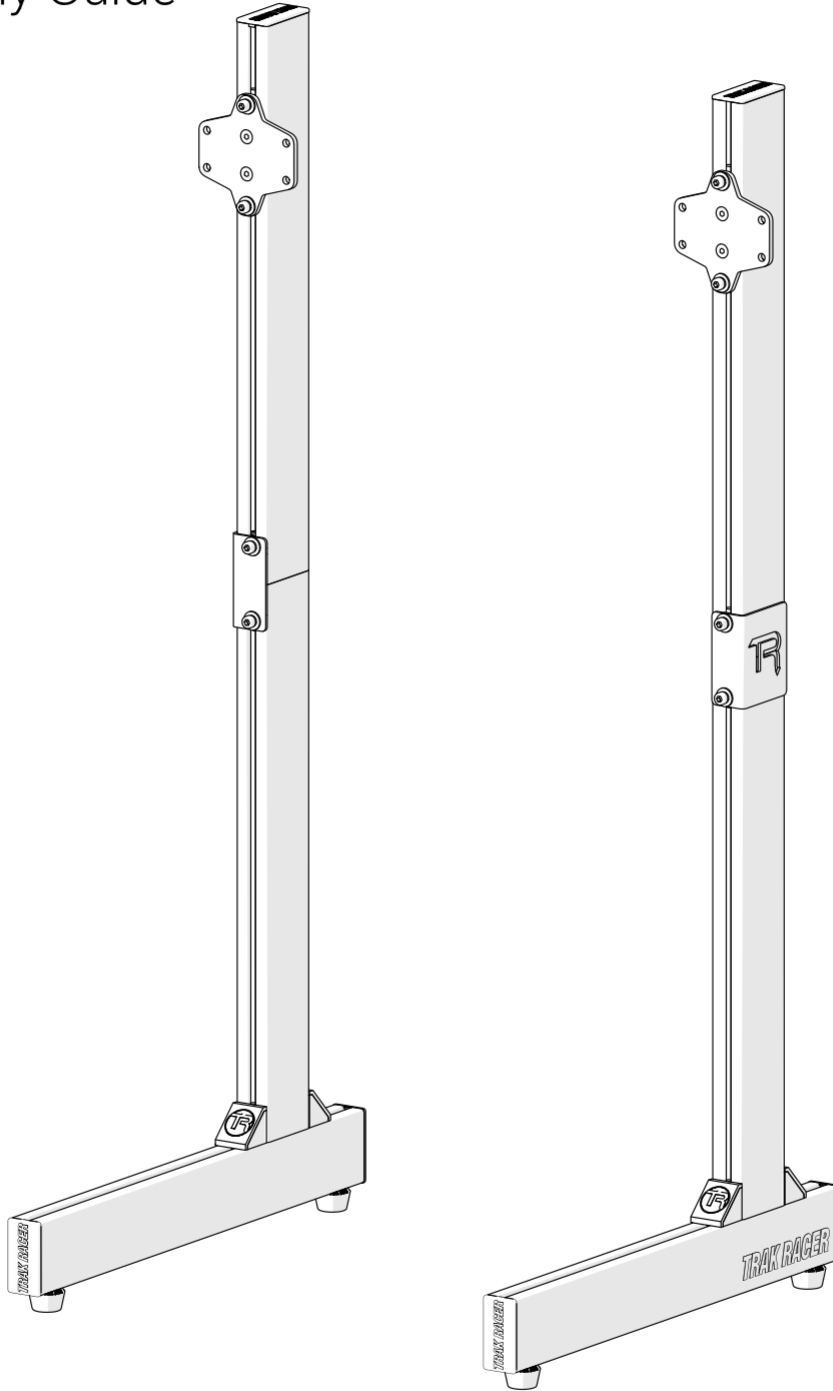

**IMPORTANT:** Different regions may have different models. Please ensure the part number below matches that on your product's box.

**TR80-FMMS6**



**TRAK RACER**

Published Apr 15, 2025

# TABLE OF CONTENTS

3 Symbol Legend

---

4 Part List

---

5 Assembly Notes

---

8 Assembly Instructions



**IMPORTANT:** Since there are different versions of each product based on your region, please make sure you are using the correct set of instructions. The part number below should match the one on your box.



**IMPORTANT:** Due to the nature of cut aluminum profiles, some metal shavings may remain despite our thorough QA cleaning process. We recommend opening boxes and packaging on a hard surface.



**NOTE:** Some screws and washers may be pre-installed. These are included in the parts list and will need to be loosened and reattached according to the instructions.



Recommended: Two people for the task



Tighten the hardware



Keep the hardware loose for adjustments



Make the necessary adjustments



Break the tab off the corner bracket



Safety glasses required



Attention/Priority needed




Reserve for the next step



Mirrored components (same on both sides)


# PART LISTS



600mm (23.62")

Aluminum Profile


TR-8040-600 x4



400mm (15.75")


Aluminum Profile

TR-8040-400 x2




Connector Plate

SS-01 x2




Connecting Bracket Plate

AP-TV-S x2




Corner Bracket

BC-40 x4




Corner Bracket with Cap

BC-40-CAP x4



40x80 End Cap


EC-80 x6



M8

M8 T-Nut


NS-M8 x32



M8x20mm

M8x20 Cap Hex Screw


SH-M8-20 x28



M8x16mm

M8x16 Flat Hex Screw


SF-M8-16 x4



M8x16mm

M8x16 Washer (Flat)


WF-M8-16 x4



M8x20mm


M8x20 Washer (Flat)

WF-M8-20 x24




M8 Lock Washer

WL-M8 x24



Rubber Foot


FR-01 x4



Reinforced Support Plate  
(Left)  
SRP-L x1




Reinforced Support Plate  
(Right)  
SRP-R x1




Long Connector T-Nut

LN-M8 x4


# NOTE

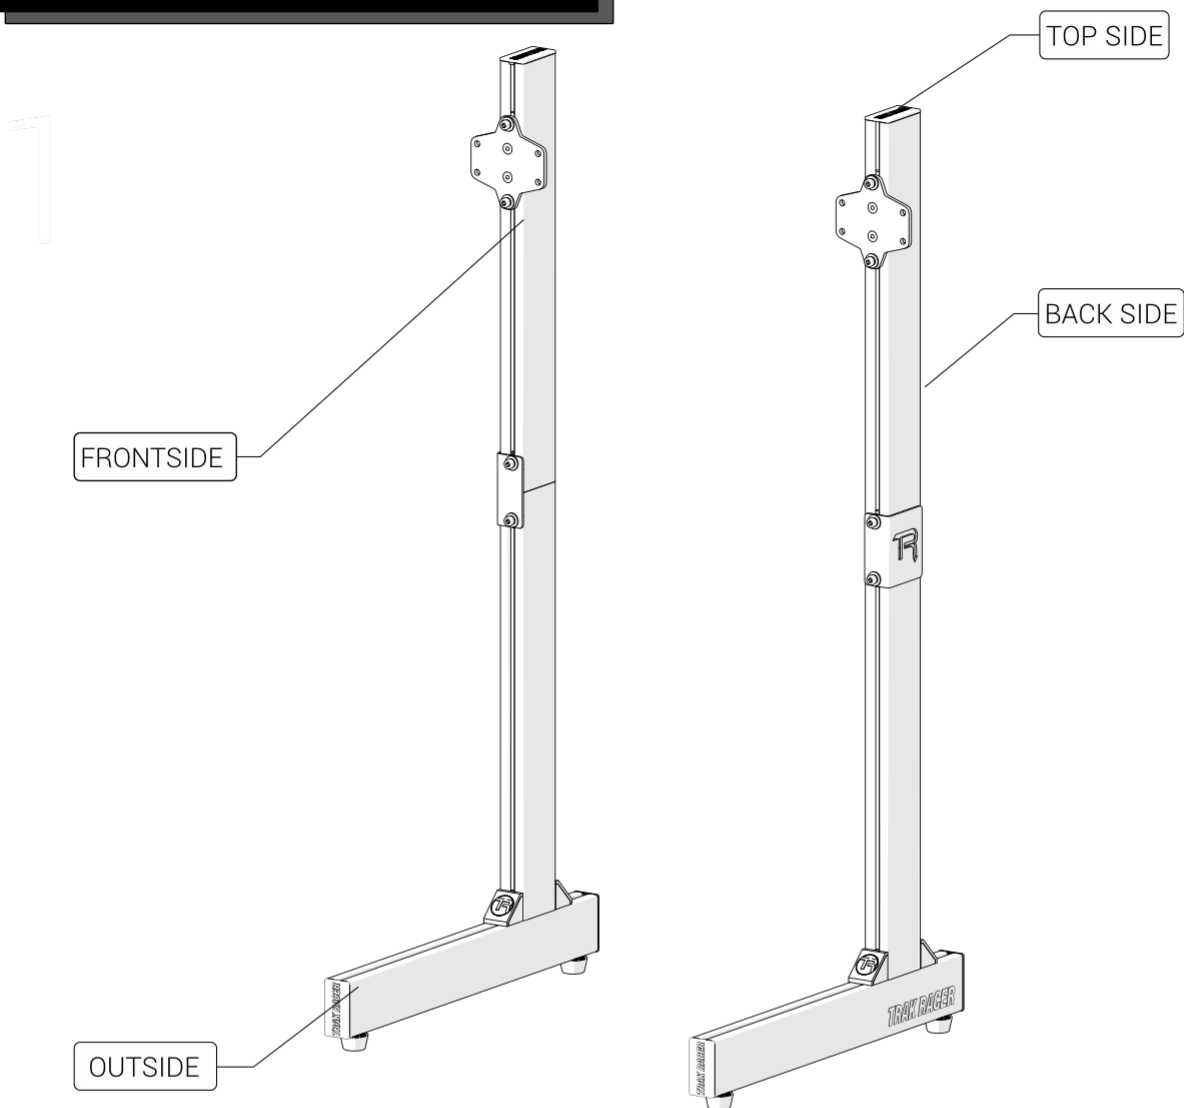

## INSTALLATION ORDER FOR SCREWS & WASHERS

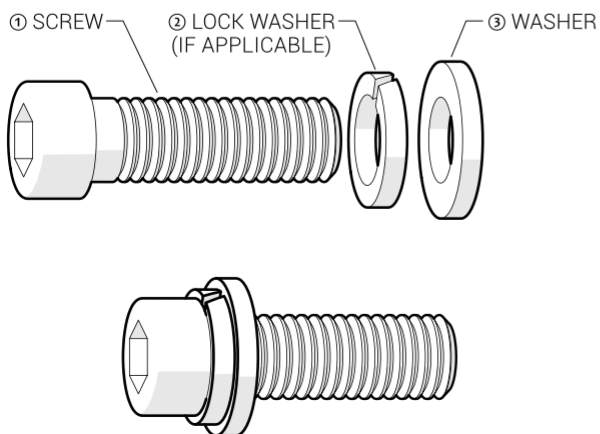







## HOW TO MEASURE SCREWS

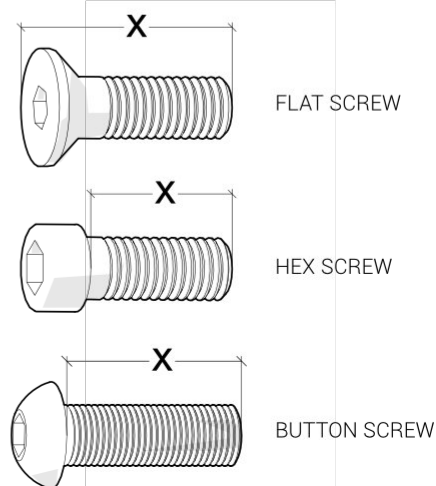

# NOTE

## BC-40 & CB-40


These brackets come with guide tabs on the rear. These tabs help align the brackets to the profile when fitted in the same orientation as the profile. When used in the alternate orientation, these tabs are designed to snap off for a flush mount against the profile.

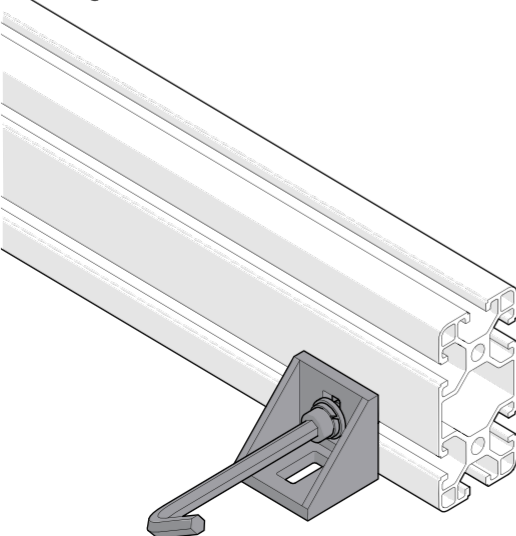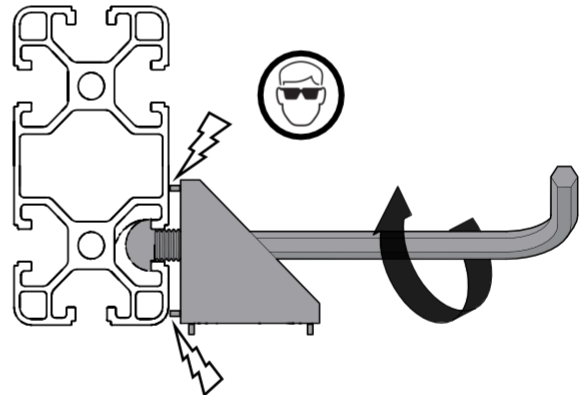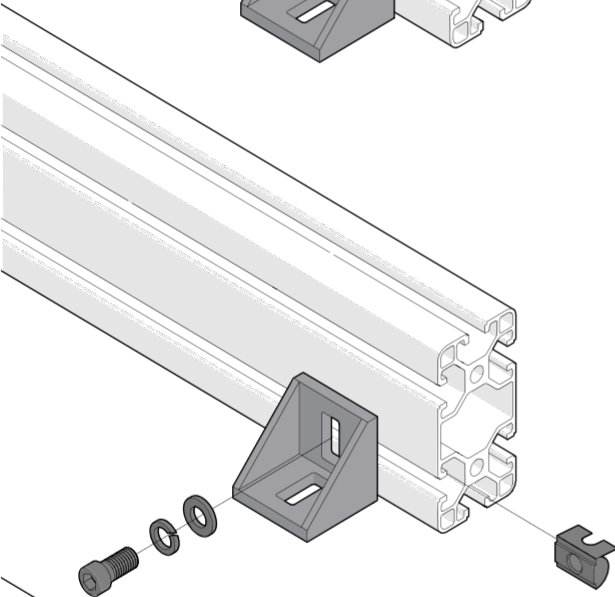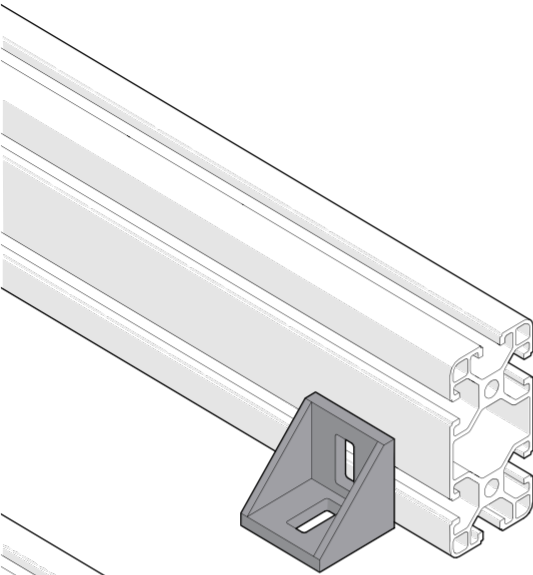

# NOTE

## NS-M8 & NS-M6



Slide T-Nuts into the ends of the profiles. Some must be added early, so follow the steps in this manual carefully.

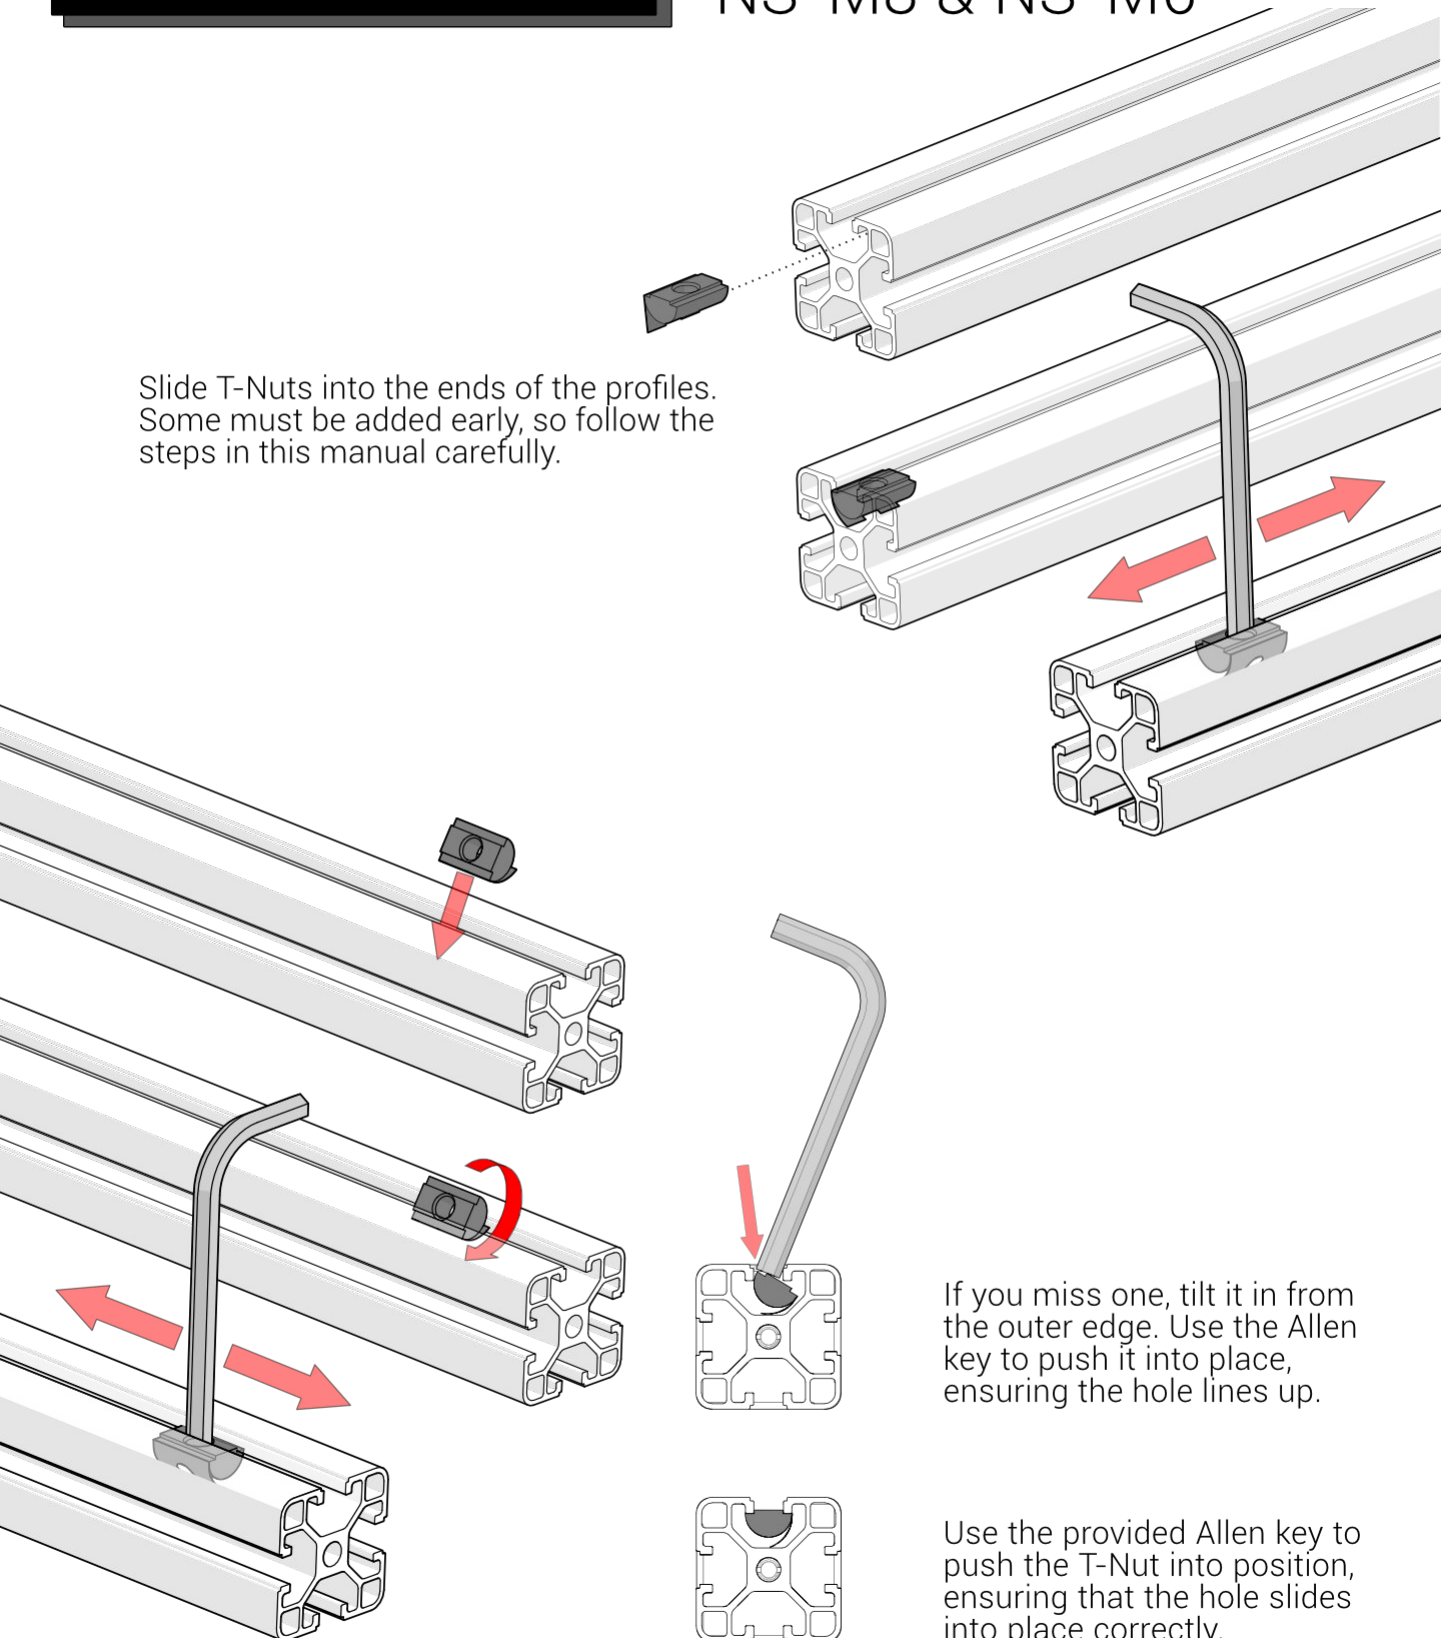



If you miss one, tilt it in from the outer edge. Use the Allen key to push it into place, ensuring the hole lines up.

Use the provided Allen key to push the T-Nut into position, ensuring that the hole slides into place correctly.



# 1

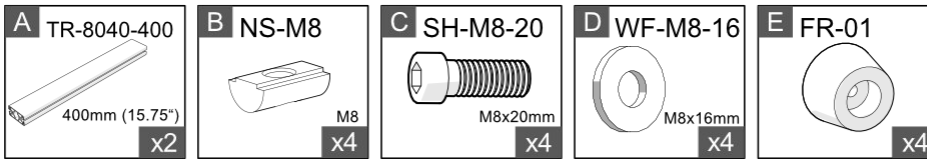


**Warning:**  
Using the stand without the rubber feet may cause damage to your floor

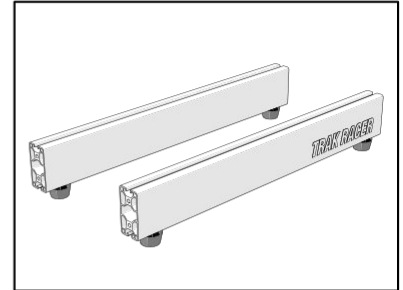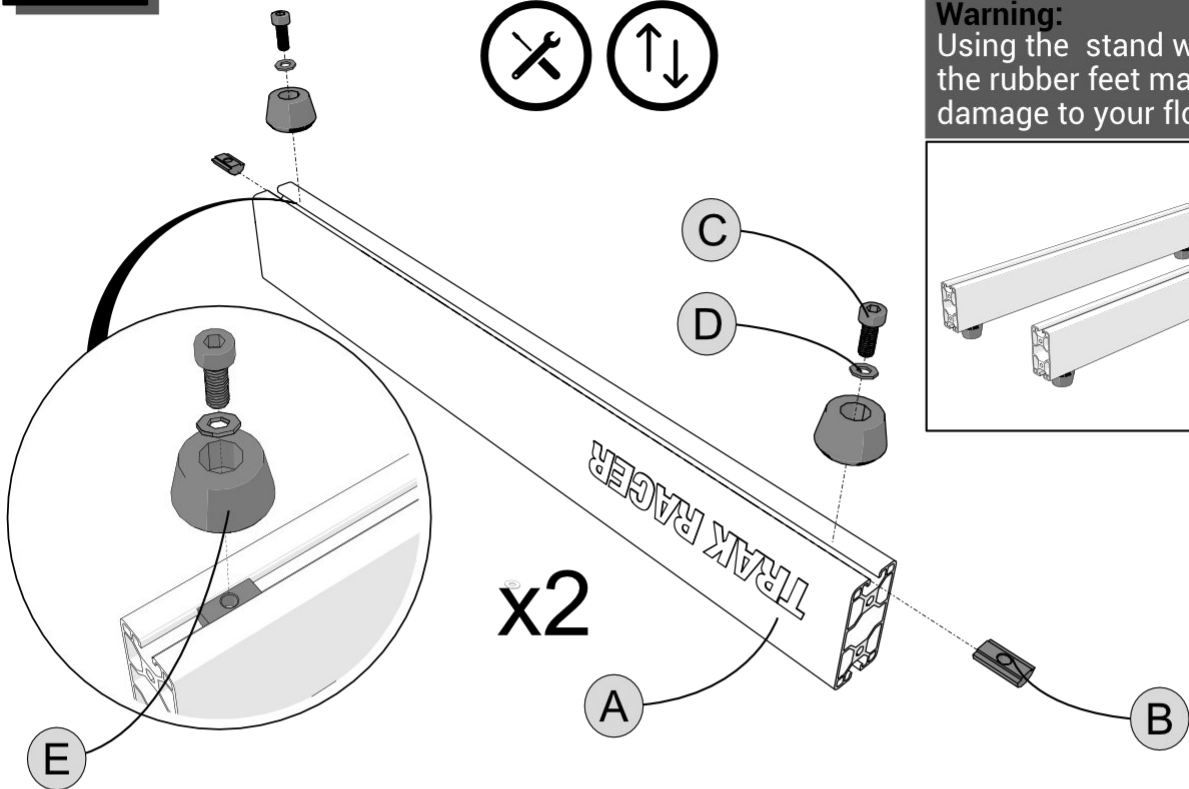

# 2




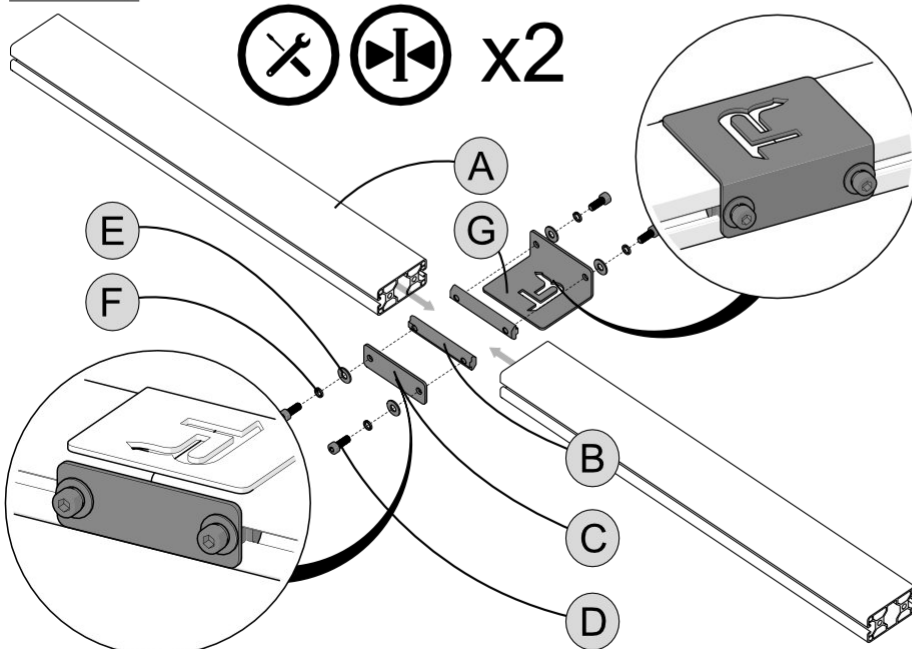
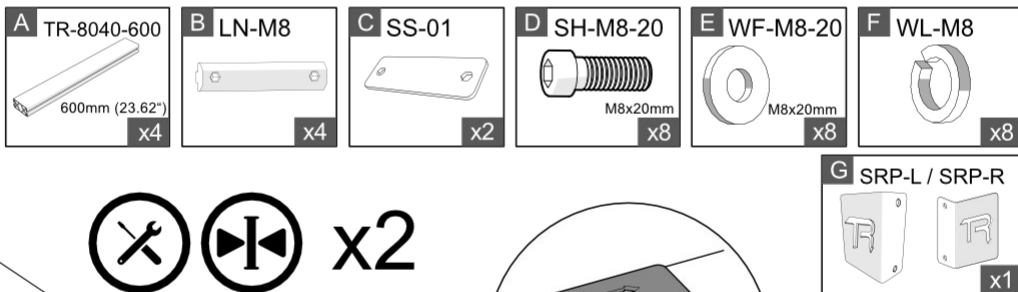


Place the long nuts (LN-M8) into the slots of two aluminum profiles (TR-8040-600) (front and back). Attach these long nuts into another set of aluminum profiles. Distribute the long nuts 50% into each profile.


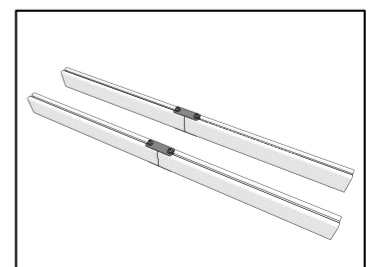


Ensure as you tighten the long nuts (LN-M8) that the aluminum profiles (TR-8040-600) stay flat to one another and in place. It helps if you tighten and hold onto one side of the leg only.








# 3



Fix the corner brackets flush/flat to the bottom of the aluminum profiles.

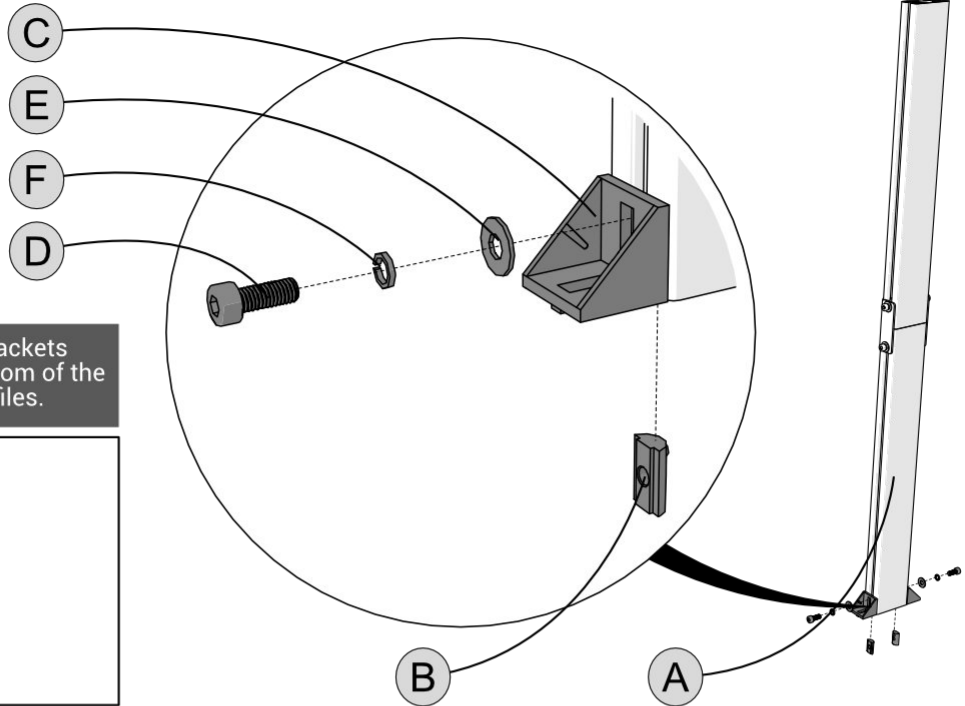
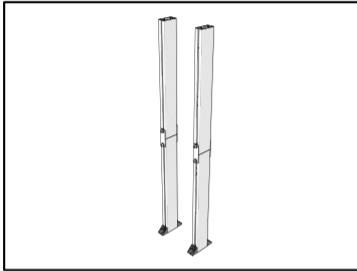


# 4

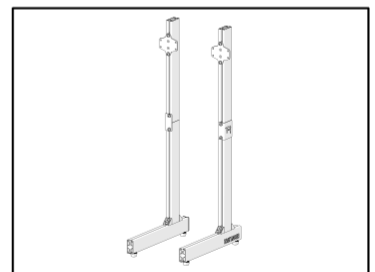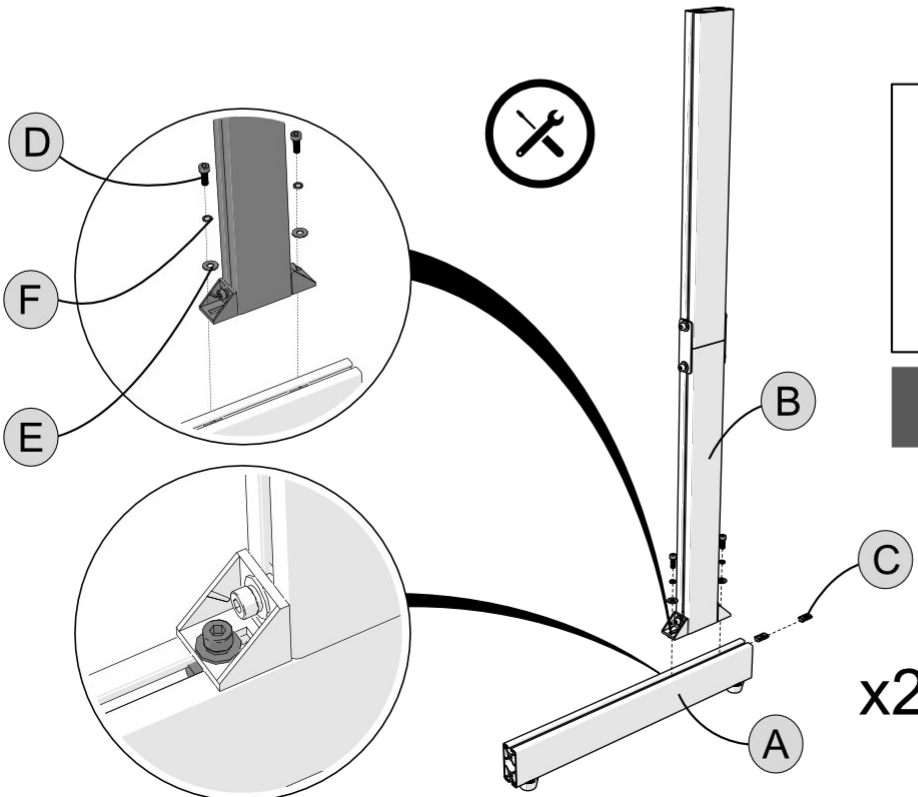


Attach parts 1 and 3 together.

# 5

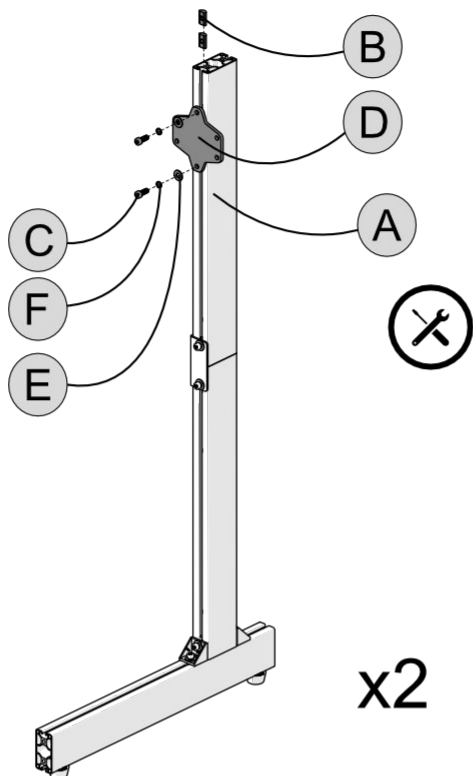
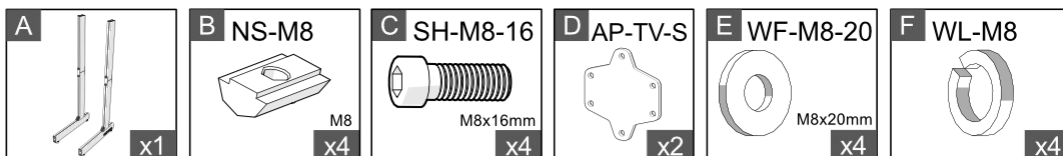


Position the top of the bracket (CP) approximately 20cm or 7 ¾" from the top of each aluminum profile. The height will need to adjust depending on the desired monitor height, but this is a good starting point.

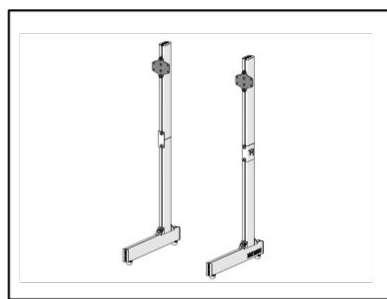


x2

# 6

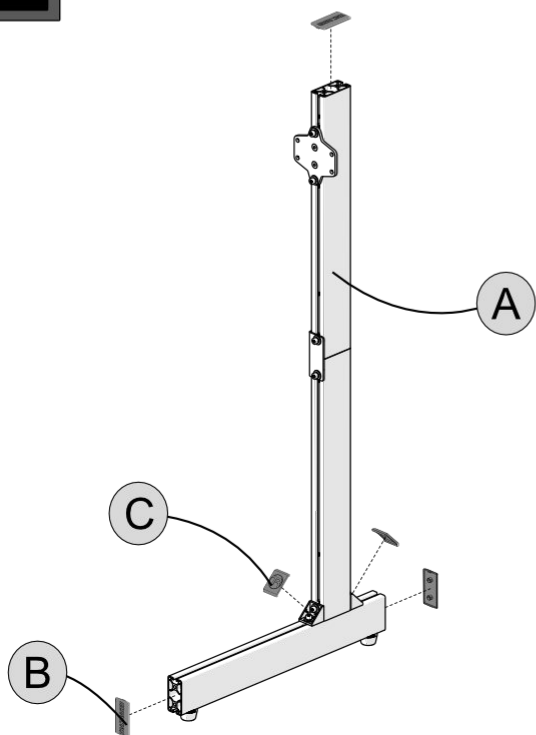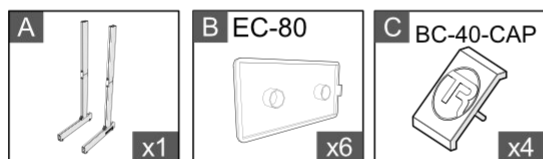

x2

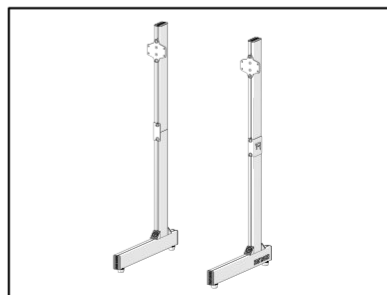

# FINISHED



**Share your build online and tag us to be featured!**



@trakracer



@trakracer



@trak\_racer